




SPLICE DETAILS

TYPICAL CONDUIT ENTRANCE DETAILS 4S. & 5S PULLBOX

1-1/4" DRILLED HOLE (MIN.)-

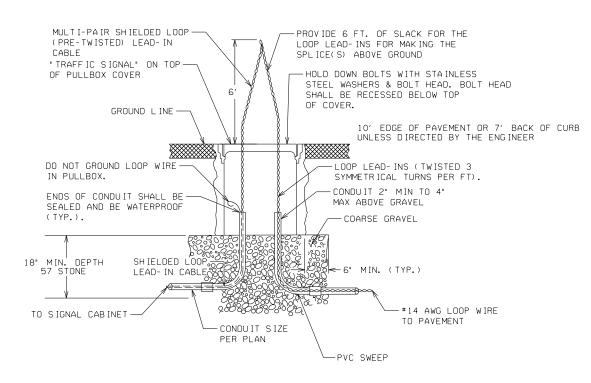

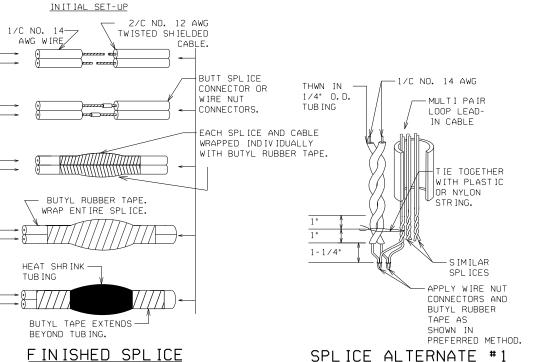



SPLICE ALTERNATE #1

SPLICE ALTERNATE #2


EDGE OF PAVEMENT DETAILS

WATERPROOF SEAL

AT END OF CONDUIT

(PREFERRED METHOD)

DETAIL WHERE NO CURB EXISTS

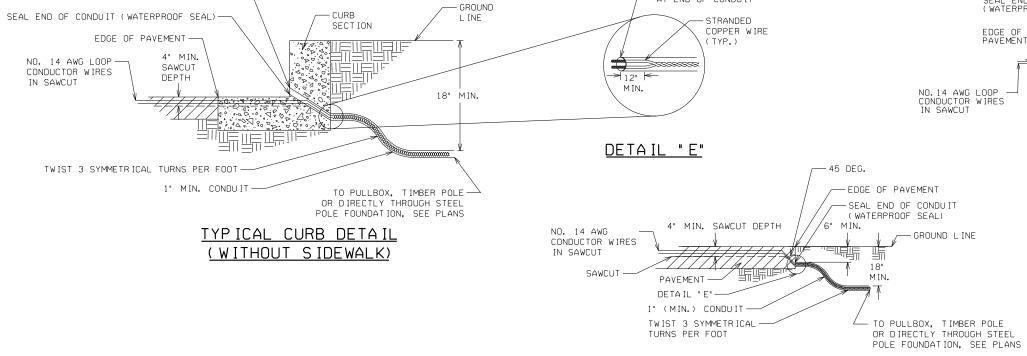

REMOVE AND -REPLACE SIDEWALK AS CURB SECTION -NECESSARY. MATCH EXISTING 1-1/4" DRILLED HOLE— (MIN.) THICKNESS. COST TO BE INCLUDED IN OVERALL BID - S IDEWALK PULLBOX - GROUND L INE SUBMITTED. SEAL END OF CONDUIT (WATERPROOF SEAL) EDGE OF PAVEMENT 18" MIN. NO CONTROL OF THE PARTY OF THE TWIST 3 SYMMETRICAL TURNS PER FOOT 1" MIN. CONDUIT -

TYPICAL CURB DETAIL (WITH SIDEWALK)

	DATE	DEPARTMENT OF TRANSPO	RTATION
	REVISION	CONSTRUCTION DETAIL INDUCTIVE LOOP DETECTOR INSTALLATION	
	ВҮ	NOVEMBER 2020 NO SCALE	NUMBER TS-OIB